

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO14025 and EN15804:2012 + A2:2019 for

## Construction Steel



The International EPD® System  
[www.environdec.com](http://www.environdec.com)

**Programme:**

EPD Turkey  
A fully aligned regional programme  
[www.epdturkey.org](http://www.epdturkey.org)

EPD International AB  
Stockholm, SWEDEN

**Programme operator:**

EPD Turkey:  
SÜRATAM – Turkish Centre for  
Sustainable Production Research&Design  
Istanbul, TURKEY

**EPD registration  
number:**

S-P-04094

**Publication date:**

15.10.2021

**Validity date:**

15.09.2026

**Geographical scope:**

Turkey

**LÖZKAN**  
DENİR ÇELİK SANAYİ A.Ş.



# PROGRAMME INFORMATION

Programme	EPD Turkey, a fully aligned regional programme	The International EPD® System
	SÜRATAM – Turkish Centre for Sustainable Production Research & Design Nef 09 B Blok No:7/15 34415 Kağıthane-Istanbul/TURKEY  www.epdturkey.org info@epdturkey.org	EPD International AB Box 210 60 SE-100 31 Stockholm/SWEDEN  www.environdec.com info@environdec.com

Product Category Rules (PCR): 2019:14 Version 1.1. 2020-09-14 Construction Products  
EN 15804:2012 + A2:2019 Sustainability of Construction Works

Independent third-party verification of the declaration and data, according to ISO 14025:2006

EPD process certification

EPD verification

**Third party verifier:** Prof. Ing. Vladimír Kočí, Ph.D., MBA

**Approved by:** The International EPD® System

Procedure for follow-up of data during EPD validity involves third party verifier:

Yes


No

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804.



# WE SHAPE ENVIRONMENT

We know what we need to do to protect the environment. Recycling is one of them.

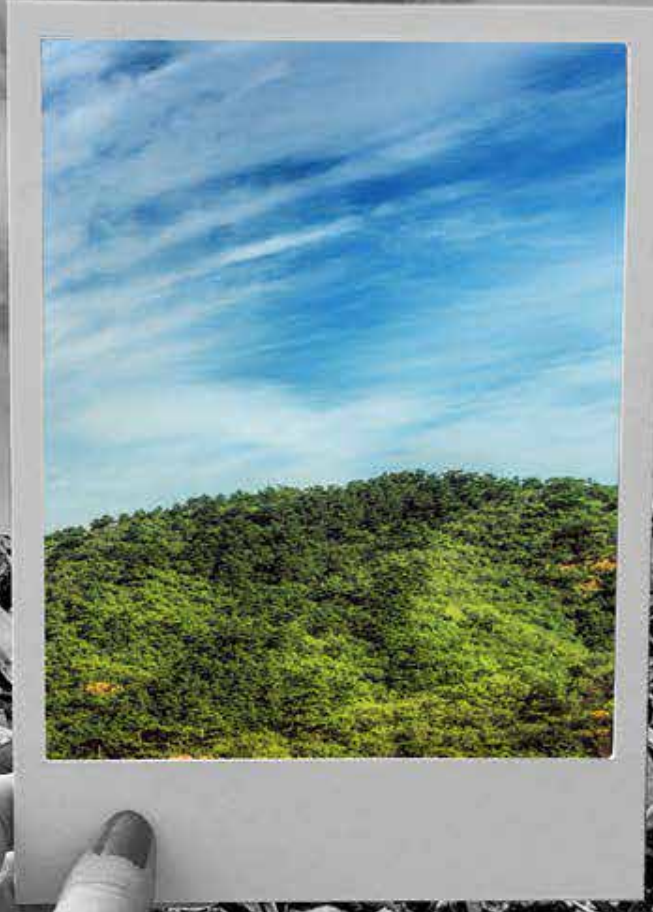

# COMPANY PROFILE

Özkan Steel was founded in 1953 and has its headquarter and production sites in İzmir-Aliğa over an area of 460,000 m<sup>2</sup>. Özkan Steel, having a melting capacity of 1,000,000 tons and rolling capacity of 700,000 tons per year, has been active in producing special steel profiles for the Shipbuilding, Offshore, Onshore, Automotive, Mining and Tunneling, Railways, Agriculture, Earth Moving, Material Handling, Machinery, Energy and Commercial Construction sectors.

Özkan Steel is exporting to more than 120 countries every year and has established itself worldwide as a well-known and trusted brand name in these sectors for its high quality, on-time delivery, flexibility, customer specific solutions and high customer satisfaction. By regarding the production of value added products as a corporate principle, Özkan Steel has been using its over 60 years of experience in hot rolling of special profiles to increase its product portfolio continuously.

Özkan Steel's product portfolio is consist of over 3,600 different sizes of profiles produced in three rolling mills with a rolling capability of 3.5 kg/m to 600 kg/m steel profiles. This accumulated experience grants Özkan Steel the ability to be one of the leading steel companies in the production of special steel grades and special steel profiles throughout the world.







**Quality**  
**Focused**  
**Production**



# QUALITY FOCUSED PRODUCTION

The aim of Özkan Steel is to provide superior know-how and customer satisfaction by developing solutions with its products that give our customers a competitive advantage.

Our products fulfill the highest requirements as a result of our more than half century know-how in metallurgy, hot rolling, machining, heat treatment, and material testing. Also, our official Research and Development Center constantly researches new methods and steel grades to increase quality and surpass customer requirements. In all phases of the production process, process parameters and product characteristics are tracked and recorded, according to the conditions specified under national/international standards and/or customer specific needs, with the guidance of dimensional properties, shape related properties, product weight, product precision, surface delivery conditions specified in the quality plans of IATF 16949 and ISO 9001 quality management systems.

## Our Product Range

### **Product description / definition:**

The product declared is “construction steel”.

OZKAN uses direct melting of scrap for the production of construction steel. Alloying elements are added in the form of ferroalloys or metals.

The production process route is Electric arc furnace -> Ladle furnace -> Continuous casting -> Hot rolling.

For the placing on the market of the product in the EU/EFTA Regulation (EU) No. 305/2011 (CPR) applies. The product needs a Declaration of Performance taking into consideration “EN 10025-1:2004 Hot rolled products of structural steels – Part 1: General technical delivery conditions” and the CE-marking.

### **Application:**

Hot rolled steel sections are being produced in various shapes for construction such as Equal&Unequal Angles, Flat&Wide Flat Bars, Square Bars, Round Bars, Beams, Channels, Special Sections ect.

Hot rolled steel sections and merchant bars are intended for bolted, welded constructions of buildings, bridges and other structures.

For example:

- Bridges (railway, road, pedestrian etc.)
- Buildings (offices, residential, shops, car parks, industrial and storage halls etc.)
- Towers (Energy transmission, telecommunication, solar farms ect.)
- Other (power plants, stadiums, convention centers, airports, stations ect.)

### **Product standards:**

EN 10025, ASTM A36 & A529 & A572 & A588 & A992 & F1554, CSA.G40, JIS G 3101, DIN 17100, DIN 17102.

### **Reference service life:**

A reference service life for structural steel sections and merchant bars is not declared. The use and maintenance requirements are not based on the steel products but on the specific design and application. These are construction products with many different application purposes. The lifetime therefore will be limited by the service life of the work.





# PRODUCT INFORMATION

Product name: Construction steel

UN CPC code: 412

Geographical scope: Turkey

## Technical Properties (Construction Steel)

GRADE	MATERIAL NUMBER	STANDARD		C	Si	Mn	P	S	Al	Cu	Cr	Ni	Others
300W	-	CSA G40.21	max	0.22	0.40	1.50	0.040	0.050	-	0.35	0.25	0.50	Remain.
			min	-	-	0.50	-	-	-	-	-	-	
350W	-	CSA G40.21	max	0.23	0.40	1.50	0.040	0.050	-	0.35	0.25	0.50	Remain.
			min	-	-	0.50	-	-	-	-	-	-	
350WT	-	CSA G40.21	max	0.22	0.40	1.50	0.030	0.040	-	0.35	0.25	0.50	Remain.
			min	-	0.15	0.80	-	-	-	-	-	-	
A36	-	ASTM A36	max	0.27	0.40	0.90	0.040	0.050	-	-	-	-	Remain.
			min	-	-	0.60	-	-	-	-	-	-	
GRADE 50	-	ASTM A572	max	0.23	0.40	1.35	0.030	0.030	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
GRADE 60	-	ASTM A572	max	0.26	0.40	1.35	0.030	0.030	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
GRADE 65	-	ASTM A572	max	0.26	0.40	1.35	0.030	0.030	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
GRADE B	-	ASTM A588	max	0.20	0.50	1.35	0.040	0.050	-	0.40	0.70	0.50	Remain.
			min	-	0.10	0.75	-	-	-	0.20	0.40	-	
A992	-	ASTM A992	max	0.23	0.40	1.60	0.035	0.045	-	0.60	0.35	0.45	Remain.
			min	-	-	0.50	-	-	-	-	-	-	
Grade 55 - S1	-	ASTM F1554	max	-	-	-	0.040	0.050	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
SS540	-	JIS G 3101	max	0.30	-	1.60	0.040	0.040	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
ST 37-2	1.0037	DIN 17100	max	0.25	-	-	0.065	0.065	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
ST 44-2	1.0044	DIN 17100	max	0.24	-	-	0.060	0.060	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
ST 52-3	1.0841	DIN 17100	max	0.22	-	-	0.050	0.050	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
StE 500	1.8907	DIN 17102	max	0.21	0.60	1.70	0.035	0.030	-	0.20	0.30	1.00	Remain.
			min	-	0.10	1.00	-	-	0.020	-	-	-	



# PRODUCT INFORMATION

## Technical Properties (Construction Steel - CPR)

GRADE	MATERIAL NUMBER	STANDARD		C	Si	Mn	P	S	Al	Cu	Cr	Ni	Others
E295	1.0050	EN 10025-2	max	-	-	-	0.055	0.055	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
S235JR	1.0038	EN 10025-2	max	0.19	-	1.50	0.045	0.045	-	0.60	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
S275JR	1.0044	EN 10025-2	max	0.24	-	1.60	0.045	0.045	-	0.60	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
S275J0	1.0143	EN 10025-2	max	0.21	-	1.60	0.040	0.040	-	0.60	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
S275J2	1.0145	EN 10025-2	max	0.21	-	1.60	0.035	0.035	-	0.60	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
S355JR	1.0045	EN 10025-2	max	0.27	0.60	1.70	0.045	0.045	-	0.60	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
S355J0	1.0553	EN 10025-2	max	0.23	0.60	1.70	0.040	0.040	-	0.60	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
S355J2	1.0577	EN 10025-2	max	0.23	0.60	1.70	0.035	0.035	-	0.60	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
S355K2	1.0596	EN 10025-2	max	0.23	0.60	1.70	0.035	0.035	-	0.60	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
S355J0W	1.8959	EN 10025-5	max	0.16	0.50	1.50	0.035	0.035	-	0.55	0.80	0.65	Remain.
			min	-	-	0.50	-	-	0.020	0.25	0.40	-	
S355NL	1.0546	EN 10025-3	max	0.20	0.55	1.75	0.030	0.025	-	0.60	0.35	0.55	Remain.
			min	-	-	0.85	-	-	0.015	-	-	-	
S460N	1.8901	EN 10025-3	max	0.22	0.65	1.80	0.035	0.030	-	0.60	0.35	0.85	Remain.
			min	-	-	0.95	-	-	0.015	-	-	-	
S460M	1.8827	EN 10025-4	max	0.18	0.65	1.80	0.035	0.030	-	0.60	0.35	0.85	Remain.
			min	-	-	-	-	-	0.015	-	-	-	
ST 52-3	1.0841	DIN 17100	max	0.22	-	-	0.050	0.050	-	-	-	-	Remain.
			min	-	-	-	-	-	-	-	-	-	
StE 500	1.8907	DIN 17102	max	0.21	0.60	1.70	0.035	0.030	-	0.20	0.30	1.00	Remain.
			min	-	0.10	1.00	-	-	0.020	-	-	-	







# SYSTEM BOUNDARY

Upstream			Core													Downstream	Other Environmental Information
Raw Material	Raw Material Transport	Manufacturing	Transport to Plant	Construction / Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Deconstruction / Demolition	Transport to Disposal Site	Waste Processing	Disposal	Future reuse, recycling or energy recovery potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X	

This EPD's system boundary has been defined as cradle to gate with options, comprising modules A1-A3, C1-C4 and module D. Besides, A4: Transport stage was added as optional.

## A1: Raw Material Supply

Production starts with raw materials. Raw material stage includes raw material extraction/preparation and pre-treatment processes before production.

## A2: Transportation

Transport is relevant for delivery of raw materials and other materials to the plant and the transport of materials within the plant.

## A3: Manufacturing

Manufacturing starts with the melting in steel plant and is followed by rolling of the steel. Electricity and natural gas are consumed during manufacturing stage. The end products are then packaged to be sold.

## A4: Transport to Site

Transport of final product to site is taken as the weight average values for transportation for the year of 2020.



# SYSTEM BOUNDARY

## C1: Deconstruction / Demolition

For demolition stage it is assumed that 0.239 MJ/kg of energy is consumed (Gervasio and Dimova, 2018).

## C2: Transport to Disposal Site

This stage includes the transportation of the discarded profiles to final disposal. Average distance from demolition site to waste processing site for final disposal is assumed to be 100 km.

## C3: Waste Processing

As it is assumed that the waste is going to landfill, there is no need for any waste process.

## C4: Disposal

Disposal is the final stage of product life and it is assumed that 85% of the steel is send to be recycled while the rest ends up in landfill.

## D: Benefits and Loads Beyond the system Boundary

In this stage, benefits from the recycled steel specified in the disposal stage were calculated.










# LCA INFORMATION

<b>Declared Unit</b>	1 tonne of construction steel
<b>Time Representativeness</b>	Average data for the year of 2020
<b>Database(s) and LCA Software Used</b>	TLCID ver. 1.0 (Turkish Lifecycle Inventory Database), Ecoinvent 3.5 SimaPro 9.0

## System Boundary of the LCA Study

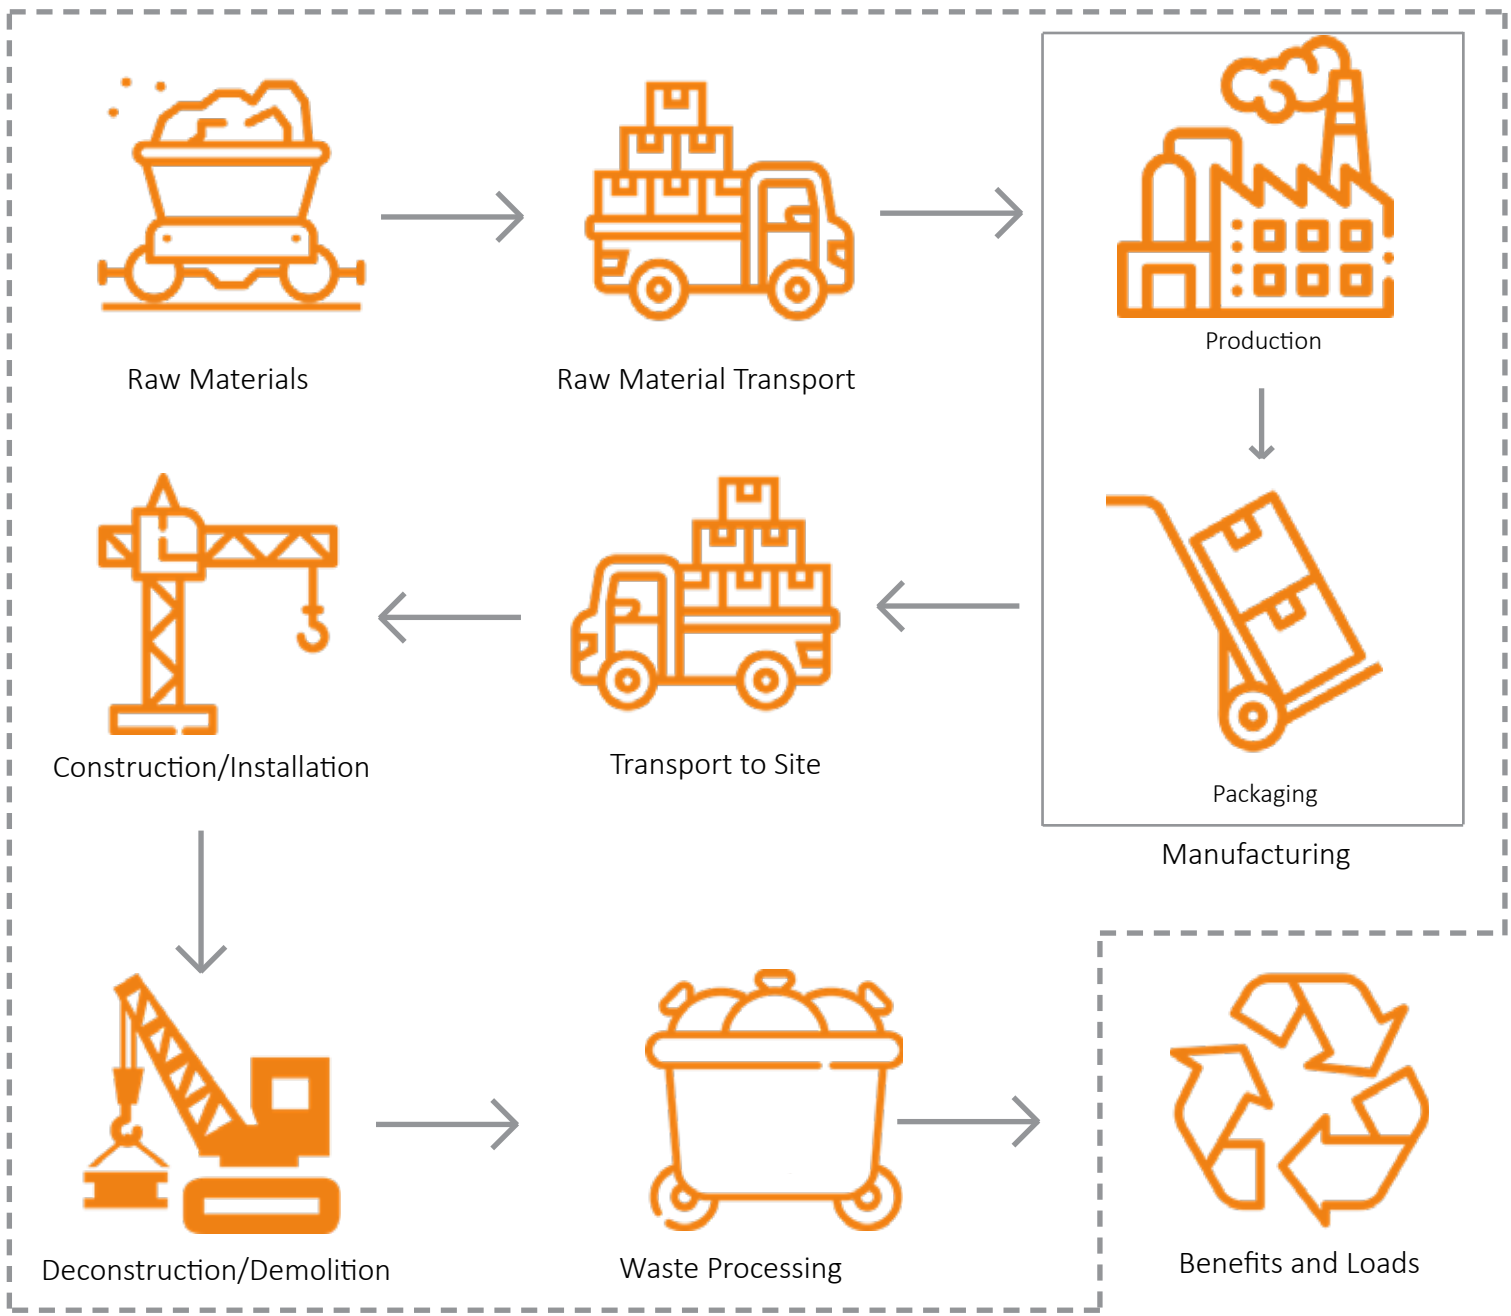

-- System Boundary

# MORE INFORMATION

The results of the LCA with the indicators as per EPD requirement are given in the LCA result tables. All energy calculations were obtained using Cumulative Energy Demand (LHV) methodology, while fresh water use is calculated with selected inventory flows in SimaPro according to the PCR.


There are no co-products in the production. Hence, there is no need for co-product allocation.

Energy consumption and transport datasets were allocated based on the average production figures for the year of 2020, and weighted average of environmental impacts for the construction steel were presented.

Accordingly, hazardous and non-hazardous waste amounts were also allocated based on the average waste arisings for the period of 2020.

All the waste resulting from the main production and related processes is managed as per Waste Management Plan of Özkan Steel in accordance with Turkish laws and regulations.

No substances included in the Candidate List of Substances of Very High Concern for authorisation under the REACH Regulations are present in the onstruction steelmanufactured by Özkan Steel, either above the threshold for registration with the European Chemicals Agency or above 0.1% (wt/wt).

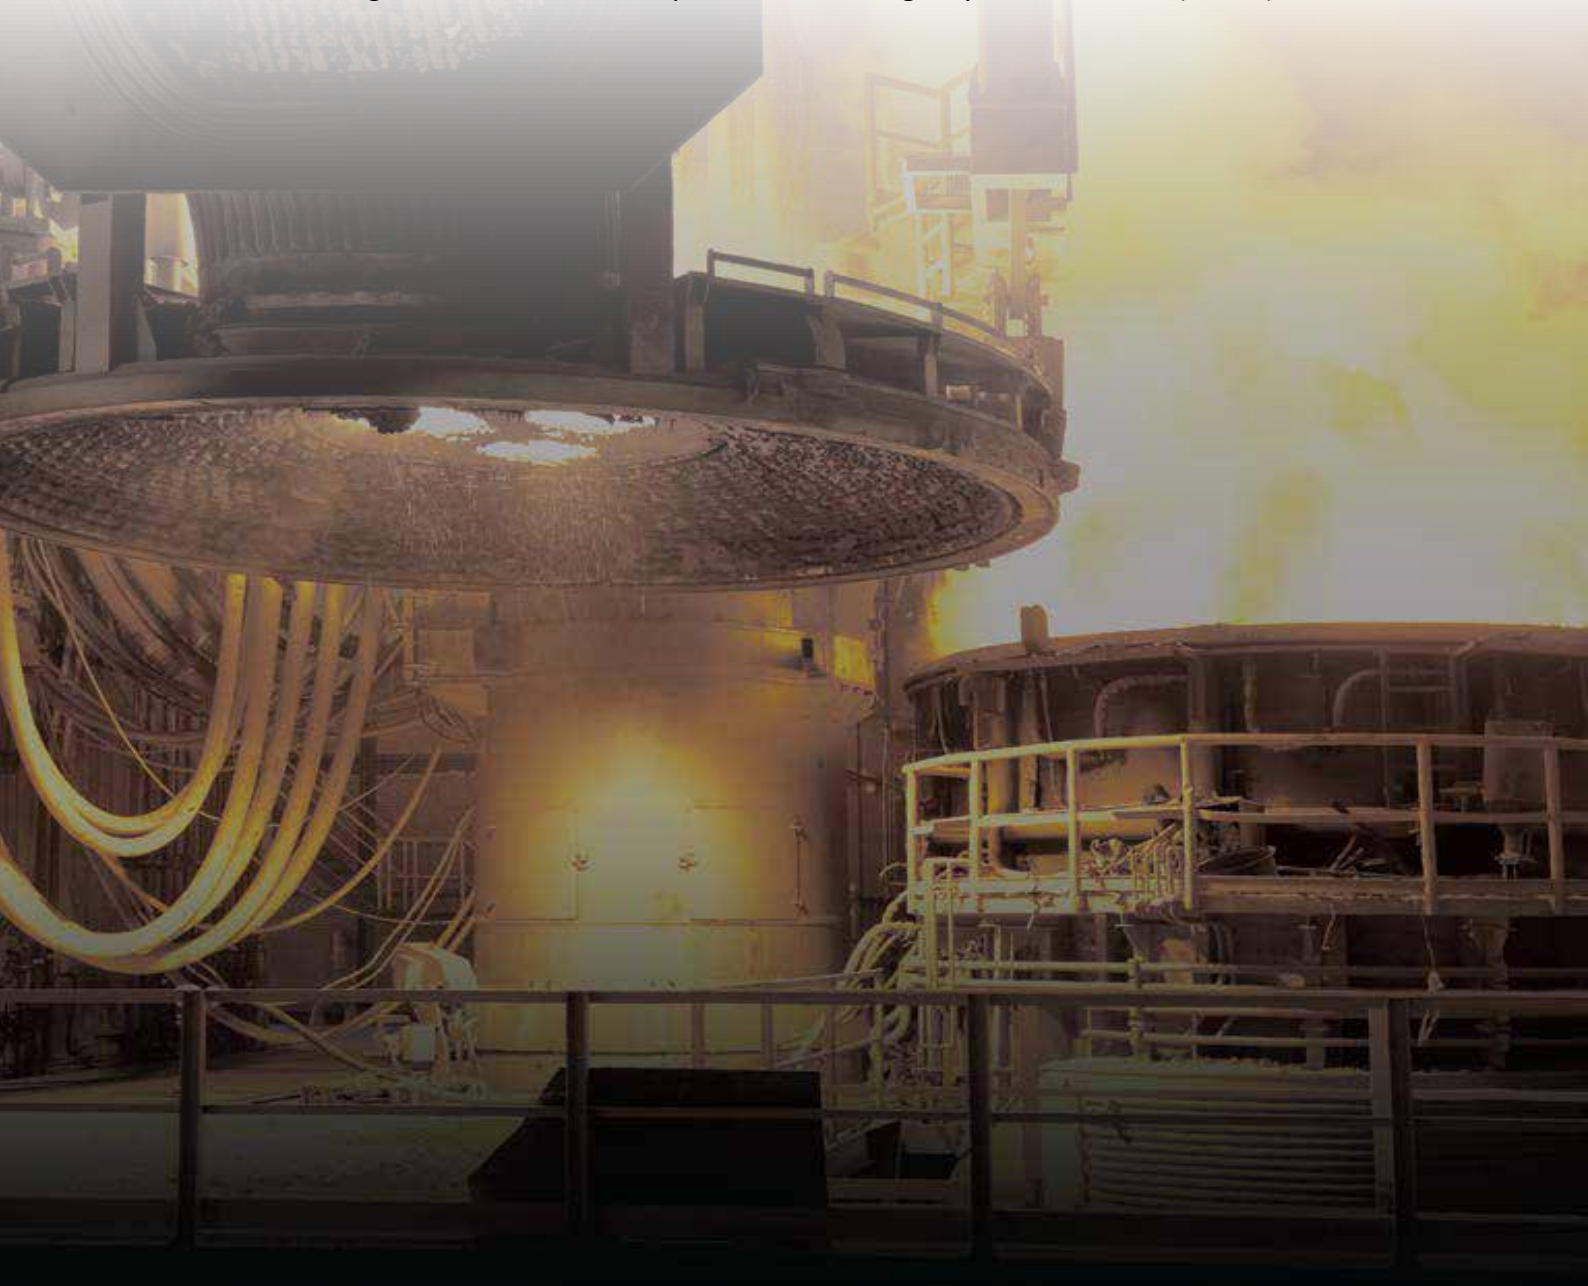






# LCA RESULTS

# LCA RESULTS

## Environmental Impacts for 1 tonne of Construction Steel

Impact Category	Unit	A1-A3	A4	C1	C2	C3	C4	D
GWP - Fossil	kg CO <sub>2</sub> eq	1.00E+3	81.9E+0	37.3E+0	21.6E+0	0	7.84E+0	-65.2E+0
GWP - Biogenic	kg CO <sub>2</sub> eq	11.1E+0	58.5E-3	933E-3	2.45E-3	0	116E+0	1.78E+0
GWP - Luluc	kg CO <sub>2</sub> eq	7.21E+0	35.3E-3	525E-3	7.61E-3	0	2.05E-3	-48.1E-3
GWP - Total	kg CO <sub>2</sub> eq	1.02E+3	81.9E+0	38.8E+0	21.6E+0	0	124E+0	-63.4E+0
ODP	kg CFC-11 eq	64.0E-6	17.2E-6	799E-9	4.77E-6	0	511E-9	-11.3E-6
AP	mol H+ eq	5.53E+0	1.36E+0	235E-3	87.0E-3	0	24.2E-3	-574E-3
EP - Freshwater	kg P eq	624E-3	9.17E-3	35.2E-3	1.95E-3	0	2.21E-3	-29.9E-3
EP - Freshwater	kg PO <sub>4</sub> eq	1.91E+0	28.1E-3	108E-3	5.97E-3	0	6.77E-3	-91.4E-3
EP - Marine	kg N eq	1.08E+0	280E-3	41.4E-3	24.4E-3	0	231E-3	-164E-3
EP - Terrestrial	mol N eq	11.2E+0	3.13E+0	397E-3	269E-3	0	64.8E-3	-1.79E+0
POCP	kg NMVOC eq	3.20E+0	843E-3	102E-3	82.0E-3	0	45.6E-3	-493E-3
ADPE	kg Sb eq	2.03E-3	111E-6	47.1E-6	84.5E-6	0	2.72E-6	-570E-6
ADPF	MJ	14.4E+3	1.20E+3	390E+0	322E+0	0	47.6E+0	-904E+0
WDP	m <sup>3</sup> depriv.	595E+0	7.96E+0	24.0E+0	2.24E+0	0	1.67E+0	-8.91E+0
PM	disease inc.	96.6E-6	3.83E-6	875E-9	1.34E-6	0	278E-9	-7.20E-6
IR	kBq U-235 eq	44.7E+0	6.78E+0	215E-3	1.52E+0	0	304E-3	-4.92E+0
ETP - FW	CTUe	12.5E+3	826E+0	277E+0	239E+0	0	749E+0	-1.48E+3
HTTP - C	CTUh	1.33E-6	26.1E-9	4.6E-9	7.8E-9	0	4.1E-9	-48.5E-9
HTTP - NC	CTUh	9.49E-6	770E-9	291E-9	265E-9	0	206E-9	-1.71E-6
SQP	Pt	2.27E+3	455E+0	6.29E+0	186E+0	0	78.9E+0	-1.10E+3
Acronyms	GWP-total: Climate change, GWP-fossil: Climate change- fossil, GWP-biogenic: Climate change - biogenic, GWP-luluc: Climate change - land use and transformation, ODP: Ozone layer depletion, AP: Acidification terrestrial and freshwater, EP-freshwater: Eutrophication freshwater, EP-marine: Eutrophication marine, EP-terrestrial: Eutrophication terrestrial, POCP: Photochemical oxidation, ADPE: Abiotic depletion - elements, ADPF: Abiotic depletion - fossil resources, WDP: Water scarcity, PM: Respiratory inorganics - particulate matter, IR: Ionising radiation, ETP-FW: Ecotoxicity freshwater, HTP-c: Cancer human health effects, HTP-nc: Non-cancer human health effects, SQP: Land use related impacts, soil quality.							
Legend	A1: Raw Material Supply, A2: Transport, A3: Manufacturing, A1-A3: Sum of A1-A3, A4: Distribution of the end product, C1: De-Construction, C2: Waste Transport, C3: Waste Processing, C4: Disposal, D: Benefits and Loads Beyond the System Boundary, .							

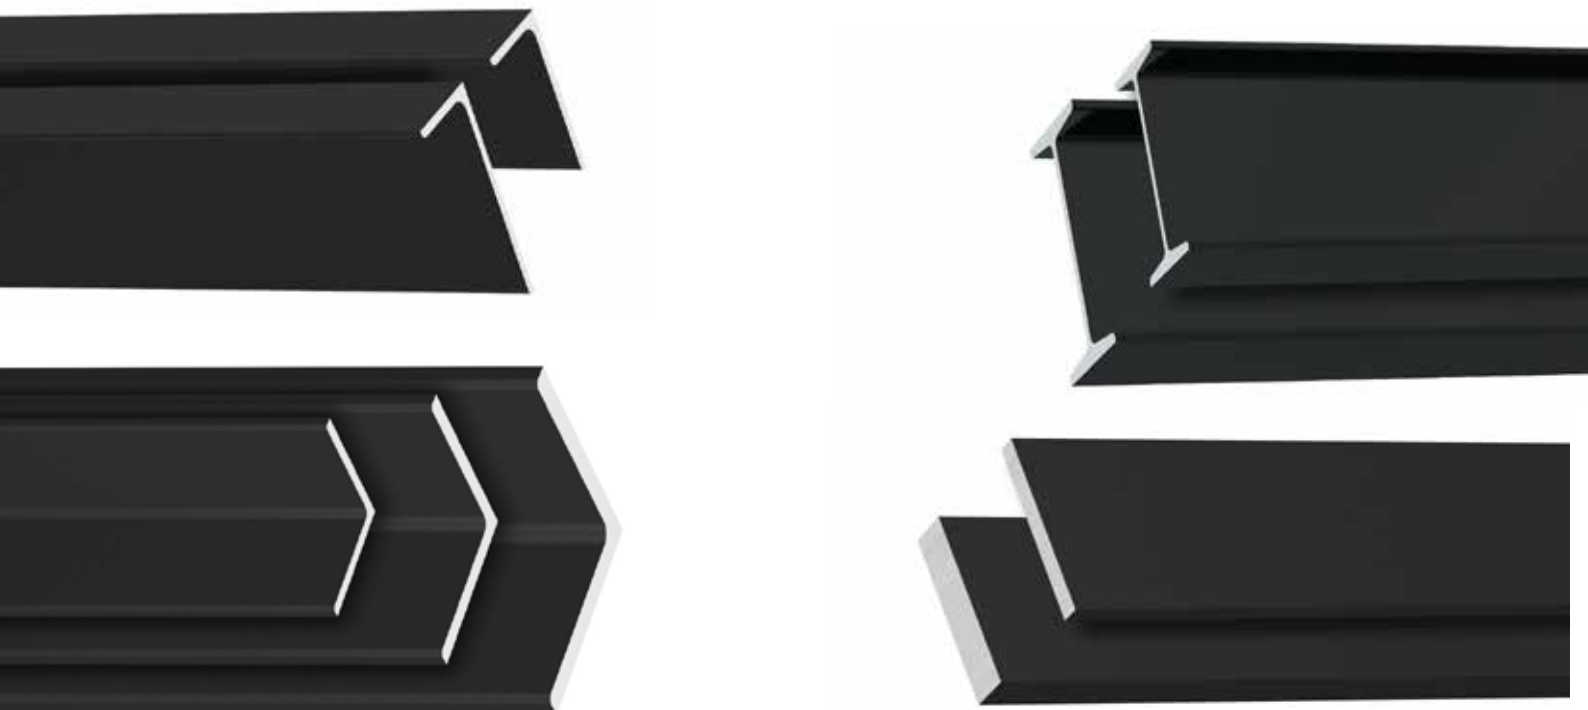

### Resource Use for 1 tonne of Construction Steel

Impact Category	Unit	A1-A3	A4	C1	C2	C3	C4	D
PERE	MJ	1.84E+3	21.2E+0	107E+0	3.56E+0	0	1.82E+0	-57.5E+0
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	1.84E+3	21.2E+0	107E+0	3.56E+0	0	1.82E+0	-57.5E+0
PENRE	MJ	14.4E+3	1.20E+3	390E+0	322E+0	0	47.6E+0	-904E+0
PENRM	MJ	0	0	0	0	0	0	0
PENRT	MJ	14.4E+3	1.20E+3	390E+0	322E+0	0	47.6E+0	-904E+0
SM	kg	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	6.05E+0	171E-3	141E-3	53.8E-3	0	39.3E-3	-227E-3

### Waste & Output Flows for 1 tonne of Construction Steel

Impact Category	Unit	A1-A3	A4	C1	C2	C3	C4	D
HWD	kg	0.10	0	0	0	0	0	0
NHWD	kg	215.85	0	0	0	0	0	0
RWD	kg	0	0	0	0	0	0	0
CRU	kg	0	0	0	0	0	0	0
MFR	kg	0	0	0	0	0	0	0
MER	kg	0	0	0	0	0	0	0
EE (Electrical)	MJ	0	0	0	0	0	0	0
EE (Thermal)	MJ	0	0	0	0	0	0	0
Acronyms	PERE: Use of renewable primary energy excluding resources used as raw materials, PERM: Use of renewable primary energy resources used as raw materials, PERT: Total use of renewable primary energy, PENRE: Use of non-renewable primary energy excluding resources used as raw materials, PENRM: Use of non-renewable primary energy resources used as raw materials, PENRT: Total use of non-renewable primary energy, SM: Secondary material, RSF: Renewable secondary fuels, NRSF: Non-renewable secondary fuels, FW: Net use of fresh water, HWD: Hazardous waste disposed, NHWD: Non-hazardous waste disposed, RWD: Radioactive waste disposed, CRU: Components for reuse, MFR: Material for recycling, MER: Materials for energy recovery, EE (Electrical): Exported energy electrical, EE (Thermal): Exported energy, Thermal.							
Legend	A1: Raw Material Supply, A2: Transport, A3: Manufacturing, A1-A3: Sum of A1-A3, A4: Distribution of the end product, C1: De-Construction, C2: Waste Transport, C3: Waste Processing, C4: Disposal, D: Benefits and Loads Beyond the System Boundary,							

### Result per functional/declared unit

Biogenic Carbon Content	Unit	A1-A3
Biogenic carbon content in product	kg C	0
Biogenic carbon content in packaging	kg C	0



# REFERENCES

/GPI/ General Programme Instructions of the International EPD® System. Version 3.0.

/ISO 14020:2000/ Environmental labels and declarations — General principles

/EN 15804:2012+A2:2019/ Sustainability of construction works - Environmental Product Declarations — Core rules for the product category of construction products

/ISO 14025/ DIN EN ISO 14025:2009-11: Environmental labels and declarations - Type III environmental declarations — Principles and procedures

/ISO 14040/44/ DIN EN ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework (ISO14040:2006) and Requirements and guidelines (ISO 14044:2006)

/Gervasio, H. and Dimova, S./ Model for Life Cycle Assessment (LCA) of buildings, EUR 29123 EN, Publications Office of the European Union, 2018, ISBN 978-92-79-79973-0,

/PCR for Construction Products and CPC 54 Construction Services/ Prepared by IVL Swedish Environmental Research Institute, Swedish Environmental Protection Agency, SP Trä, Swedish Wood Preservation Institute, Swedisol, SCDA, Svenskt Limträ AB, SSAB, The International EPD System, 2019:14 Version 1.1 DATE 2019-12-20

/The International EPD® System/ The International EPD® System is a programme for Type III environmental declarations, maintaining a system to verify and register EPD®s as well as keeping a library of EPD®s and PCRs in accordance with ISO 14025. [www.environdec.com](http://www.environdec.com)

/Ecoinvent / Ecoinvent Centre, [www.ecoinvent.org](http://www.ecoinvent.org)

/SimaPro/ SimaPro LCA Software, Pré Consultants, the Netherlands, [www.pre-sustainability.com](http://www.pre-sustainability.com)

/TLCID/ Turkish Life Cycle Inventory Database, Turkish Center for Sustainable Production Research and Design (SURATAM), [www.suratam.org](http://www.suratam.org)

# VERIFICATION & REGISTRATION

<b>Programme</b>	EPD registered through fully aligned regional programme: EPD Turkey <a href="http://www.epdturkey.org">www.epdturkey.org</a>	The International EPD® System <a href="http://www.environdec.com">www.environdec.com</a>
	 THE INTERNATIONAL EPD® SYSTEM	 THE INTERNATIONAL EPD® SYSTEM
<b>Programme operator</b>	EPD Turkey: SÜRATAM – Turkish Centre for Sustainable Production Research & Design Nef 09 B Blok No:7/15 34415 Kağıthane - Istanbul / TURKEY  <a href="http://www.epdturkey.org">www.epdturkey.org</a> <a href="mailto:info@epdturkey.org">info@epdturkey.org</a>	EPD International AB Box 210 60 SE-100 31 Stockholm / Sweden  <a href="http://www.environdec.com">www.environdec.com</a> <a href="mailto:info@environdec.com">info@environdec.com</a>
<b>Owner of the declaration</b>	  Bozköy Mahallesi 13. Cadde No:4 35800 Aliğa - İzmir / TURKEY	Contact: Ayça Çakın  Phone: (+90) 232 625 15 15 Fax: (+90) 232 625 20 89  <a href="http://www.ozkansteel.com">www.ozkansteel.com</a> <a href="mailto:info@ozkansteel.com">info@ozkansteel.com</a>
<b>LCA practitioner</b>	Turkey: Lalegül Sok. No:7/18 Kağıthane 34415 4. Levent – Istanbul / TURKEY Phone: (+90) 212 281 13 33	The United Kingdom: 4 Clear Water Place Oxford OX2 7NL, UK Phone: 0 800 722 0185  <a href="http://www.metsims.com">www.metsims.com</a> <a href="mailto:info@metsims.com">info@metsims.com</a>
<b>3<sup>rd</sup> party verifier</b>	  Prof. Ing. Vladimír Kočí, Ph.D., MBA	LCA Studio Šárecká 5,16000 Prague 6 - Czech Republic  <a href="http://www.lcastudio.cz">www.lcastudio.cz</a>

**ÖZKAN**  
DEMİR ÇELİK SANAYİ A.Ş.



[www.ozkansteel.com](http://www.ozkansteel.com)  
[info@ozkansteel.com](mailto:info@ozkansteel.com)